


## Test Report

File Name	PG28395126000-126K	Voltage	12V
Number	275	Test Date	2019.01.24

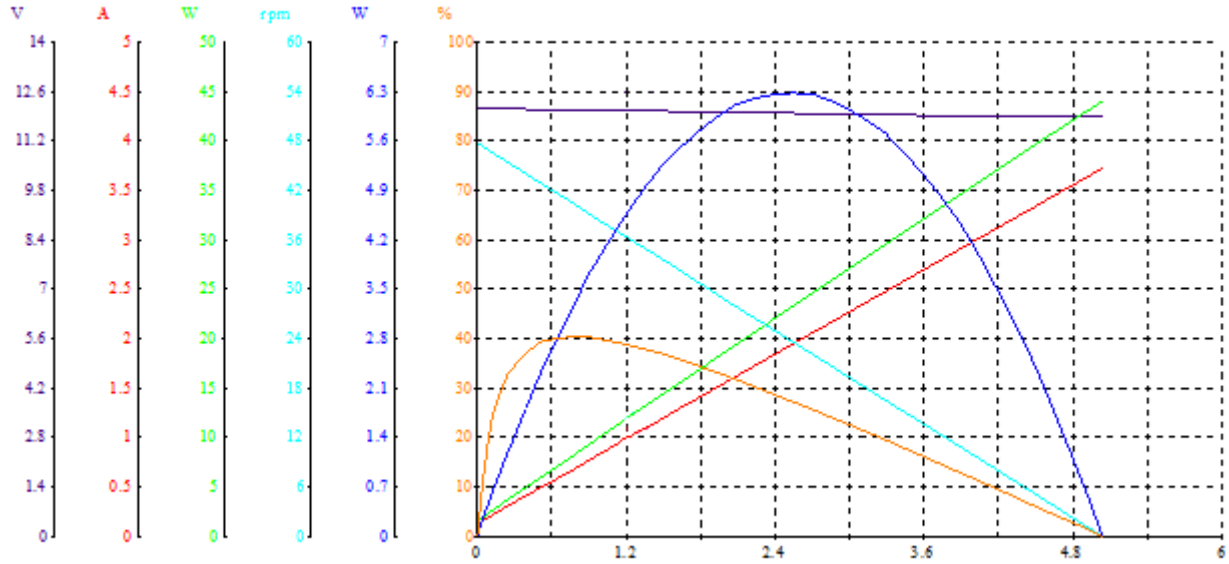

Parameters	V	A	W	N.m	rpm	W	%
No_Load	12.10	0.121	1.463	0.000	47.6	0.000	0.0
Eff_max	12.06	0.699	8.425	0.811	40.0	3.395	40.3
Pout_max	11.97	1.895	22.68	2.489	24.1	6.287	27.7
Torque_max	11.84	3.714	43.97	5.042	0.0	0.000	0.0
End	11.84	3.714	43.97	5.042	0.0	0.000	0.0

Sr. No.	V	A	W	N.m	rpm	W	%
1	12.10	0.121	1.463	0.000	47.6	0.000	0.0
2	12.09	0.149	1.799	0.039	47.3	0.193	10.7
3	12.09	0.194	2.341	0.102	46.7	0.499	21.3
4	12.09	0.211	2.548	0.126	46.5	0.613	24.1
5	12.09	0.215	2.599	0.132	46.4	0.641	24.7
6	12.09	0.248	3.004	0.179	46.0	0.861	28.7
7	12.08	0.301	3.640	0.253	45.3	1.199	32.9
8	12.08	0.358	4.319	0.332	44.5	1.547	35.8
9	12.08	0.420	5.075	0.420	43.7	1.921	37.8
10	12.07	0.496	5.984	0.526	42.7	2.350	39.3
11	12.06	0.598	7.218	0.670	41.3	2.898	40.2
12	12.06	0.699	8.425	0.811	40.0	3.395	40.3

13	12.05	0.773	9.315	0.915	39.0	3.736	40.1
14	12.04	0.888	10.70	1.077	37.5	4.225	39.5
15	12.03	1.032	12.42	1.279	35.6	4.761	38.3
16	12.02	1.176	14.14	1.481	33.7	5.217	36.9
17	12.01	1.320	15.85	1.682	31.7	5.592	35.3
18	12.00	1.464	17.56	1.884	29.8	5.887	33.5
19	11.99	1.607	19.27	2.086	27.9	6.101	31.7
20	11.98	1.751	20.98	2.288	26.0	6.234	29.7
21	11.97	1.895	22.68	2.489	24.1	6.287	27.7
22	11.96	2.039	24.38	2.691	22.2	6.259	25.7
23	11.95	2.183	26.08	2.893	20.3	6.151	23.6
24	11.94	2.326	27.77	3.095	18.4	5.962	21.5
25	11.93	2.470	29.46	3.296	16.5	5.693	19.3
26	11.92	2.614	31.15	3.498	14.6	5.343	17.1
27	11.91	2.758	32.84	3.700	12.7	4.912	15.0
28	11.90	2.901	34.52	3.902	10.8	4.401	12.7
29	11.89	3.045	36.20	4.103	8.9	3.809	10.5
30	11.88	3.189	37.88	4.305	7.0	3.137	8.3
31	11.87	3.333	39.55	4.507	5.1	2.384	6.0
32	11.86	3.477	41.22	4.709	3.1	1.551	3.8
33	11.85	3.620	42.89	4.911	1.2	0.637	1.5
34	11.84	3.714	43.97	5.042	0.0	0.000	0.0