Both suction and pumping can be used.

Creative Miniature Water Pump

EDLP600 Diaphragm pump

Wide application

Gas-liquid Dual Purpose/Oxygen Enhancement/Air Inhalation/Pumping

kamoer
EDLP600-12B
B9102041841

Product features

Pretty

Small size

Low noise

Maintenance-free

Long life

Long life

Wide application

Good tightness

Wide application is appropriate everywhere.

EDLP600 is a miniature diaphragm pump, gas-liquid dual-purpose, it is based on the principle of volume pump design.It is driven by the eccentric wheel on the axis of the motor to drive the rubber circulation and reciprocating motion in the cavity. The suction and drainage actions are formed inside, and the gas and liquid can be inhaled and discharged by closing and opening the one-way valve.

Pump watering

Fish tank pumping

Drug irrigation

Water supply by water drill

Water Cooling of Laptop Computer

Gas analysis

Kamoer
EDLP600-12B

Performance parameter

Exquisite workmanship without maintenance

Excellent performance

Product features

- Exquisite workmanship, strong and durable structure
- No oil, no maintenance
- Compact design
- Low power consumption
- Appearance analysis


Φ27mm
62.1mm
EDLP600-12B



A 型



B 型

BOM	Motor (V)	Electric current (A)	Power (W)	Gas flow l/min	Liquid flow ml/min	Positive Mpa	Negative Mpa	Noise m/db	Life expectancy	Model	g
CK.20.84.0001	12	0.3	5	≥1	≥600	≥0.05	≥0.04	≤60	200	EDLP600-12A	65
CK.20.84.0002	24	0.15	5	≥1	≥600	≥0.05	≥0.04	≤60	200	EDLP600-24A	65
CK.20.84.0003	12	0.3	5	≥1	≥600	≥0.05	≥0.04	≤60	200	EDLP600-12B	65
CK.20.84.0004	24	0.15	5	≥1	≥600	≥0.05	≥0.04	≤60	200	EDLP600-24B	65

Appearance analysis, product advantages, at a glance

Low noise, low heat, industrial grade raw materials

Low noise & low heating

Professional motor matching, large voltage regulation range, low heating, low noise, small electromagnetic interference, long service life, etc.

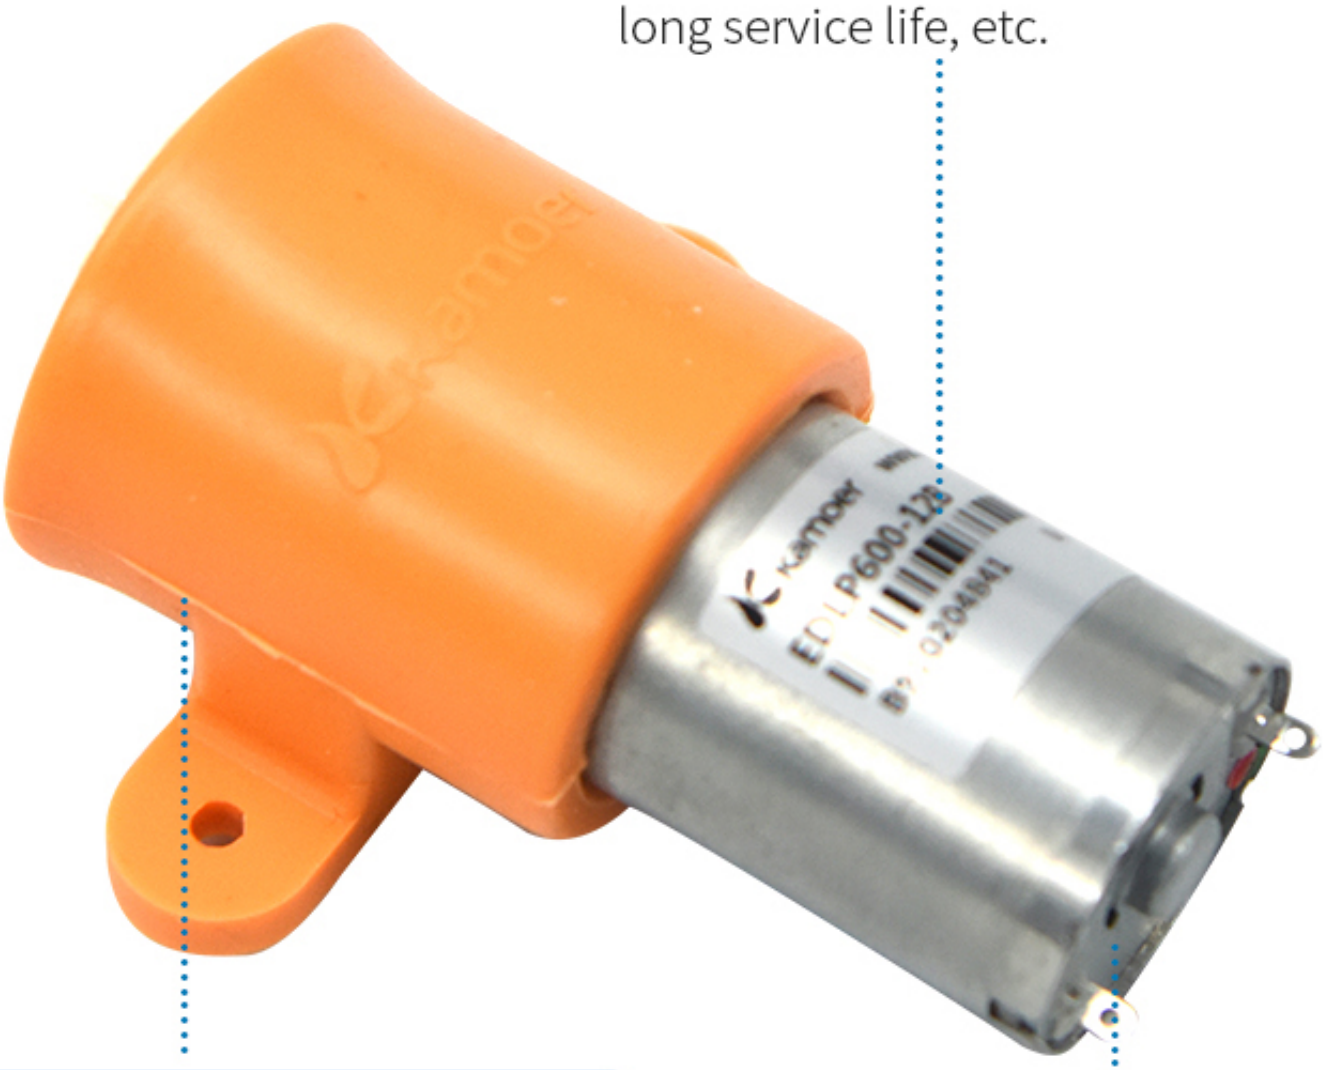
kamoer
kamoer

Industrial grade raw materials

Special customized industrial grade raw materials are used to meet various harsh conditions, such as high and low temperature, for a long time and continuous use.

Wire interface

The flow rate can reach 600 ml/min.

Pressure of 0.04 Mpa can be generated

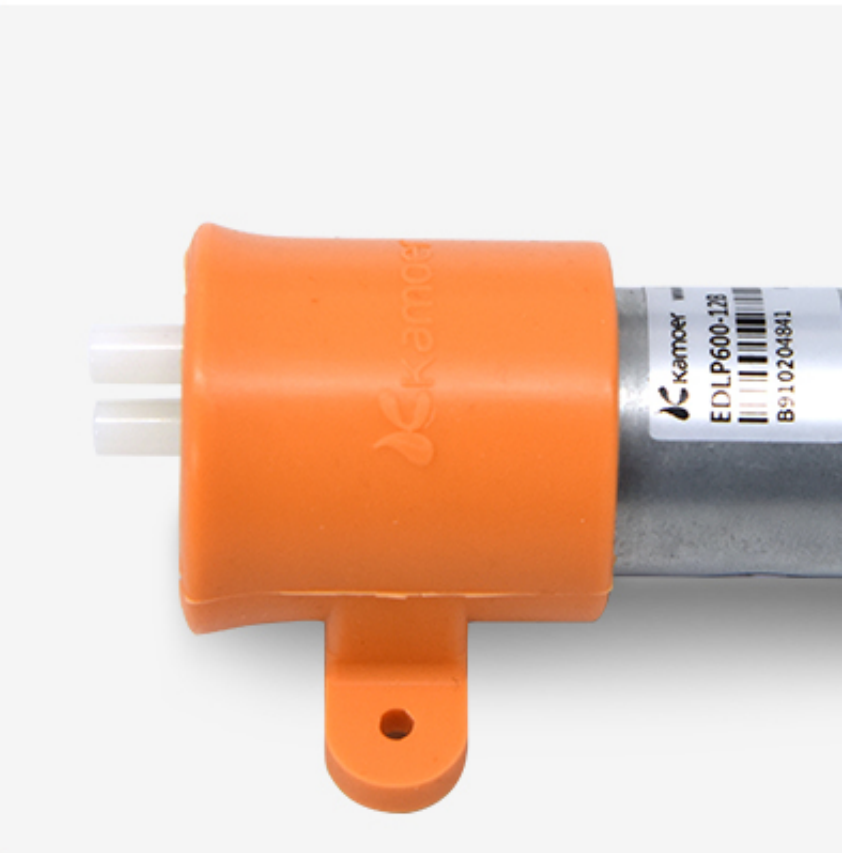
Kamoer
Kamoer
EDLP600-12B
B910204841

Protection and shock absorption

optional can add one set of "coat"

With plastic fixed seat, the fuselage is better protected and the noise and vibration are less.

Kamoer
Kamoer
EDLP600-12B
B910204841

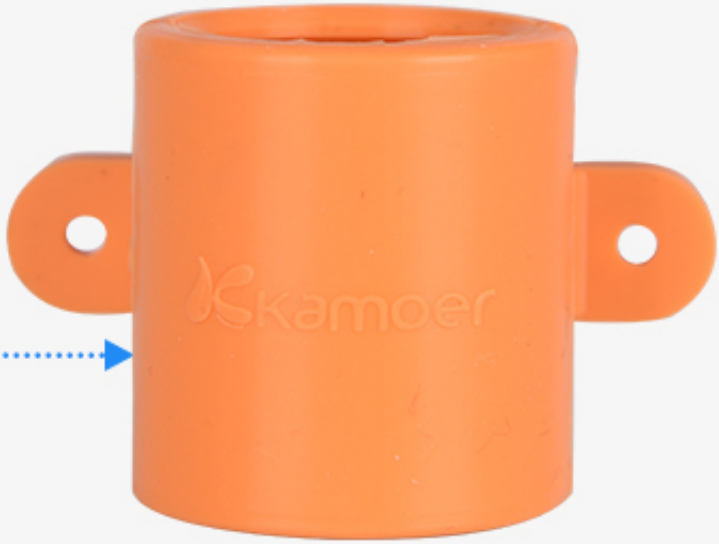

If you want to buy plastic fixed backseat, please click here.

Click Enter ▶

Installation Structural Drawings

Accurate and reliable fluid transmission

If you want to buy another power adapter, please click here.

Click Enter ▶

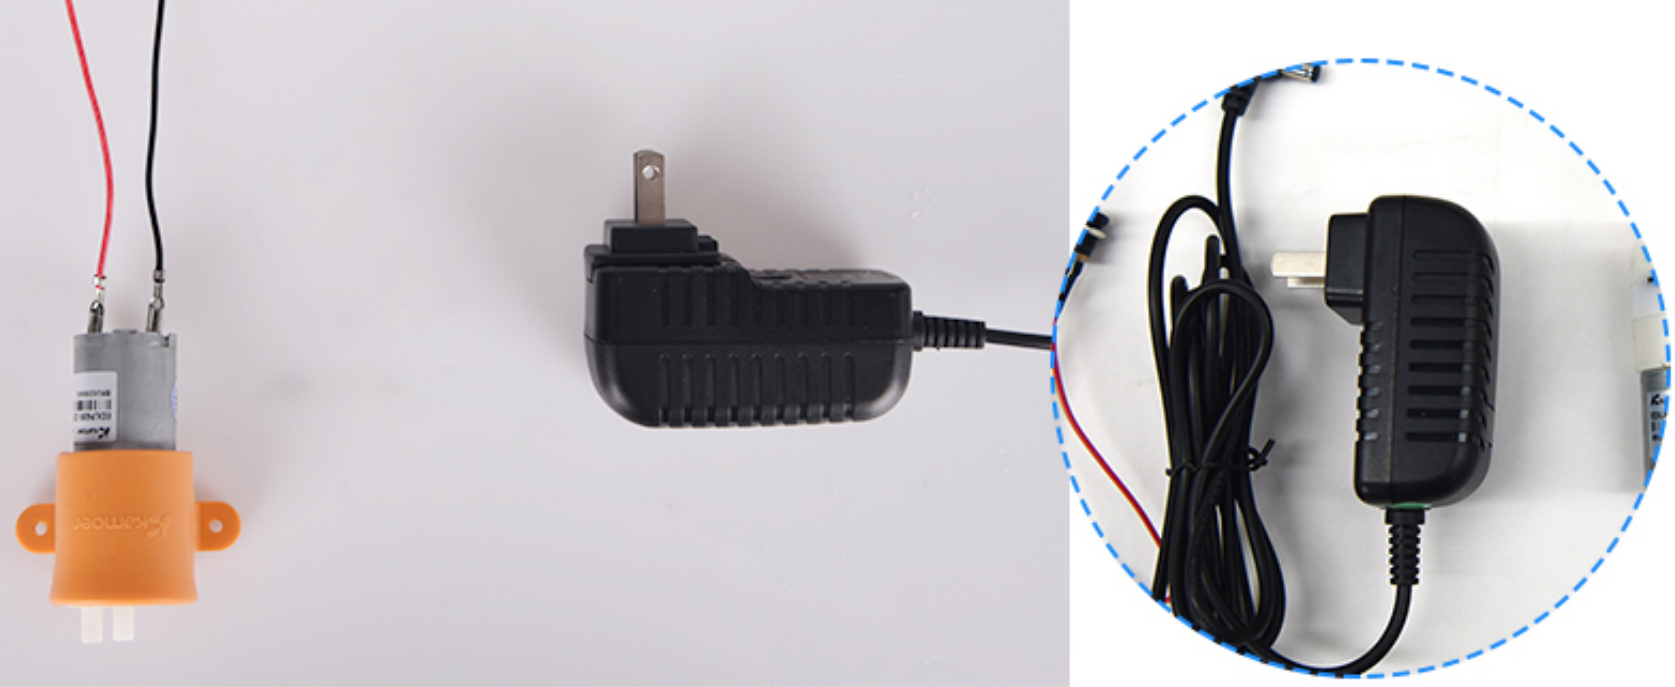

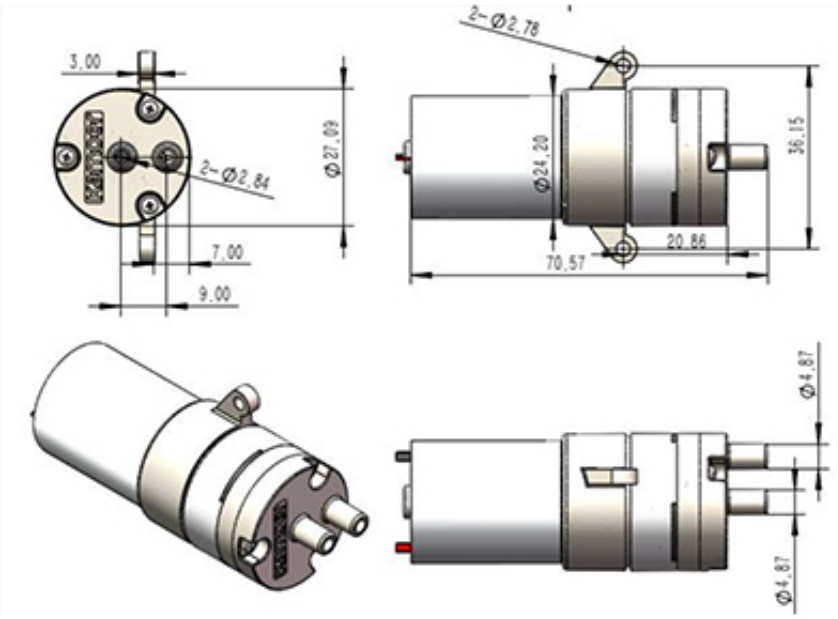
3.00
2-Ø2.78
2-Ø2.84
Ø27.09
7.00
9.00
Ø24.20
36.15
20.86
70.57
Ø4.87
Ø4.87

A 型

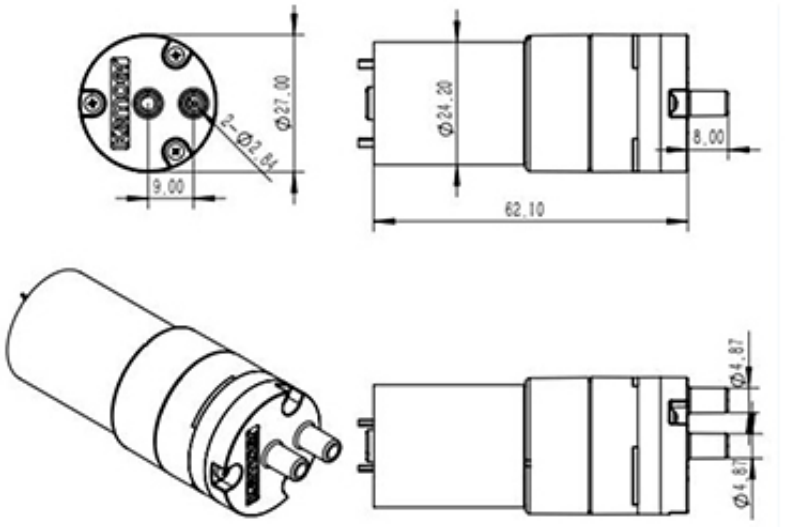
Ø27.00
2-Ø2.84
9.00
Ø24.20
8.00
62.10
Ø4.87
Ø4.87

B 型

Precautions

01 Family drinking water

It is suggested to buy imported food grade silicon tubes, which are colorless, tasteless and have better effect.

02 Prohibitory matters

No gasoline, alcohol, corrosive strong acid, strong alkali, brine, vinegar are all right.

03

Fish tank pumping

There are impurities in the fish tank, fish stool (passengers easily blocked, if hard things damage the diaphragm pump, the pump is useless, so relatives should cooperate with the filter screen if they use this product)

04

Pumping time

It is forbidden to break the cycle for more than 24 hours at a time. one or three hours at a time in the summer is all right.

kamoer
EDLP600-12B
B910204841

kamoer
EDLP600-12B
B910204841

Your choice is our responsibility